


CAT 3 UTP 50 Port Termination Panel

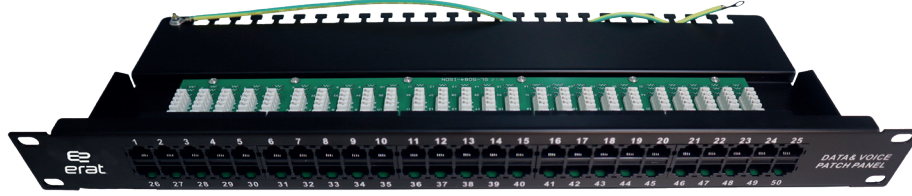

Benefits & Features

- Including all necessary accessories for installation (labels, colorful icons, organizers, cable ties, screw-nut)
- It allows cable terminations and patch panel labeling to be performed easily and regularly in a short time. It contains information that explains in detail and clearly how the installation should be done; it helps to minimize installation errors.
- The organizer for the back side of the patch panel provides simple and easy termination and cable arrangement.
- High quality metal frame. Robust and easy to install design.
- Category: CAT 3
- 483 mm (19") suitable for cabinet mounting
- Cable installation via color-coded LSA strips according to EIA/TIA 568 A&B
- Fixing the cable with a cable tie
- Central ground connection
- Clamp: >200 acc. According to ISO/IEC 11801, IEC 60603-7-5
- IDC cable size: 22 – 26 AWG solid and multi-wire conductor
- Dielectric strength: 1000 VDC (Contact/Contact), 1500 VDC (Contact/Ground)
- Ports: 50

Physical Properties

Conducting December	22 to 26 AWG, Solid or stranded Cables
Metal Frame	Galvanized Steel
Standard Color	Black
Connector Module Holder	Flame retardant plastic bileflen, UL 94 V-0
Plastic Frame material	Flame retardant plastic bileflen, UL 94 V-0
Plug Holding Force	140N min.
Storage Temperature	-20 to +80C
Operating Temperature	-40 to +60C
Packaging	1 piece/box