


CAT 6A / 7 FTP PLUG

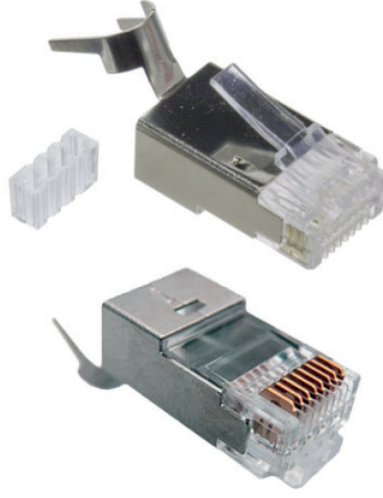

TECHNICAL SPECIFICATIONS

Gender	Male
Performance Floor	Cat6
Transfer Speed	500 Mhz
Colour	Transparent, Other Color Options
Main material	100% Imported Japanese PC
ULFlammability Rating	UL 94-V2
Contact	Brass,3 Prongs Normal 50U" Gold Plated
Inner Wire	1.1mm, (Contact us for Other Wire Options.)
Working Temperature Range	-40~+85C
Durability	750 plug - in - out
MOQ	5,000 pieces
Packaging	Normally 1000pcs/bag, Other Packaging Options
Protection	Copper shielded shell
Certificates	UL,CSA,CE,SGS,ROSH,ISO:9001

Electrical Values

Flow	125V AC,1.5A@25C
Insulation Resistance	500M Ohm dak, 100V DC/dak
Voltage Resistance	1000V AC/1 minute without failure
Contact Resistance	20M Ohm Maks.