


SC Pigtail Series

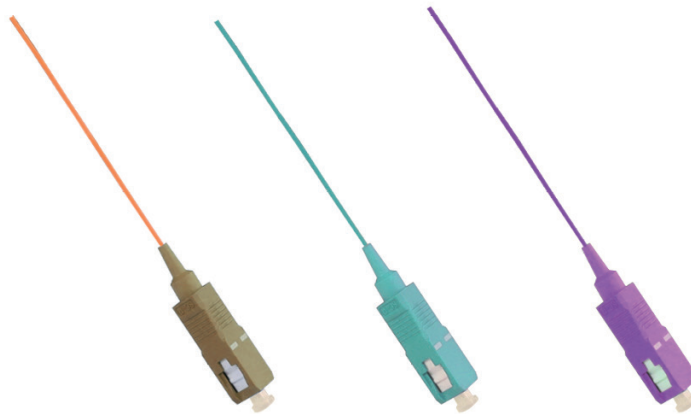

AREAS OF USE, ORDER OPTIONS, STANDARDS	
Features	<ul style="list-style-type: none"> • Connector slot/Ferrule: Zirkonyum Ceramic
Areas of use	<ul style="list-style-type: none"> • CATV, Metro, LAN • FTTH,GPON WDM DWDM,PON • Data Center • In telecommunication networks • In the Industrial, Health and Military fields • ATM, WDM
Ordering Options	<ul style="list-style-type: none"> • Single (SX) optical connection fiber cable in 12 colors • 12 Color But Options • Cable Diameters; 0.9mm • Custom-made packaging and barcoding option • Erat F/O Patch Cords SM(OS1, OS2)/MM • (OM1,OM2,OM3,OM4) LSZH/PVC • It is manufactured in every desired dimension using fibers.
Standards	<ul style="list-style-type: none"> • SM:G652D, G657A2/B3, G655 • SC IEC 61754-4 • IEC 60793-2 • TIA 492CAAC • TIA 492CAAB • TIA 492AAAA • IEC 60304 • SC/APC IEC 61754-14

PARAMETERS				
Unit	Model	PC	UPC	APC
Connector Loss	SM	≤0.25dB	≤0.20dB	≤0.15dB
	MM	≤0.30dB	≤0.20dB	≤0.30dB
Loss Of Return	SM	≥45dB	≥55dB	≥65dB
	MM	≥35dB	≥35dB	≥35dB
Operating Temperature	-40 ° C to +75 ° C			
Durability	≤0.1dB ≤0.2 dB typical change , 500 plug in/out			
Attainable Wavelength	MM - λ=850-1300 nm, SM - λ= 1310 & 1550 nm			
Cable Diameter Options	0.9mm, 2.0mm, 3.0mm, others			